


# GAA-500-90

## Especificaciones / Specification

Motor / Motor	4 Hp
Diámetro max. sierra / Blade saw diameter	500 mm
Velocidad sierra / Blade saw speed	3000 rpm
Diámetro del eje / Blade saw axis diameter	50 mm
Altura máx. de corte / Max. cutting height	170 mm
Recorrido alimentador / Feeder advance range	500 mm (1000 doble avance) 500 mm (1000 double advance)
Pisadores neumáticos / Pneumatic Clamps	6 (3 Horiz. - 3 Vert.)
Sistemas de lubricación / Lubrication systems	Neumática mediante pulverizador. Pneumatic with Spray.
Dimensiones / Dimensions	1950x1050x970 mm
Peso / Weight	450 Kg
<input type="radio"/> 90°	150 mm
<input type="checkbox"/> 90°	150x150 mm
<input type="checkbox"/> 90°	250x75 mm

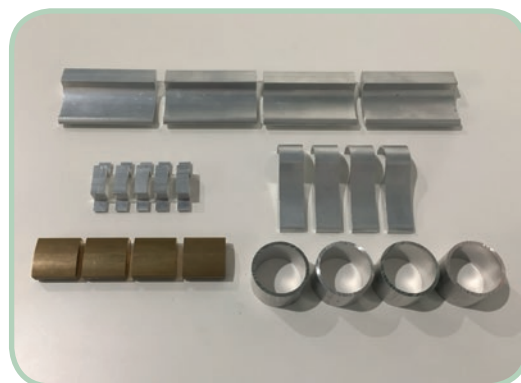

Tronzadora para el corte en modo automático con alimentador y doble avance.

- Ciclo automático.
- Alimentador automático de 500 mm. 1000 doble avance.
- Parada de emergencia.
- Velocidad de alimentación y corte regulables.
- Selector de longitud regulable de 5 a 1000 mm.
- Corte a 90°.
- Refrigeración automática aire-aceite.
- Funcionamiento semiautomático o totalmente automático.

Automatic cutting-off machine with oleopneumatic feeding system working with two strokes by default (2 times 500 mm).

- Automatic cycle.
- Automatic feeder of 500mm x 2 strokes. (500mm + 500mm).
- Emergency stop.
- Adjustable cutting and feeding speeds.
- Adjustable length selector from 5 to 1000mm.
- 90° straight cut.
- Automatic air-oil coolant pump.
- Semi-automatic or automatic operation.